

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
18 November 2004 (18.11.2004)

PCT

(10) International Publication Number
WO 2004/100213 A2

(51) International Patent Classification⁷: **H01K**
(21) International Application Number:
PCT/US2004/014414
(22) International Filing Date: 5 May 2004 (05.05.2004)
(25) Filing Language: English
(26) Publication Language: English
(30) Priority Data:
60/467,925 5 May 2003 (05.05.2003) US

(74) Agent: MCCOLLISTER, Scott, A.; Fay, Sharpe, Fagan,
Minnich & McKee, LLP, 1100 Superior Avenue, 7th Floor,
Cleveland, OH 44114 (US).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(71) Applicant (*for all designated States except US*): GEL-
CORE LLC [US/US]; 6180 Halle Drive, Valley View, OH
44125-4635 (US).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): BOHLER, Christo-
pher, L. [US/US]; 4930 Corkwood Drive, North Royalton,
OH 44133 (US). KOLODIN, Boris [US/US]; 2634 Brent-
wood Road, Beachwood, OH 44122 (US). RADKOV,
Emil [BG/US]; 26241 Lakeshore Boulevard, #670, Euclid,
OH 44132 (US). AANEGOLA, Srinath, K. [IN/US];
4810 Buckingham Drive, Broadview Heights, OH 44147
(US). WEAVER, Stanton, E., Jr. [US/US]; 119 Hemlock
Terrace, Northville, NY 12134 (US). PETROSKI, James,
T. [US/US]; 2688 Sherwood Drive, Parma, OH 44134
(US). BROWN, Zena [US/US]; 23414 Cedar Road,
Beachwood, OH 44122 (US).

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished
upon receipt of that report*

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: LED-BASED LIGHT BULB

(57) Abstract: A light source (10) comprises a light engine (16), a base (24), a power conversion circuit (30) and an enclosure (22). The light engine (16) comprises at least one LED (12) disposed on a platform (14). The platform (14) is adapted to directly mate with the base (24) which a standard incandescent bulb light base. Phosphor (44) receives the light generated by the at least one LED (12) and converts it to visible light. The enclosure (22) has a shape of a standard incandescent lamp.

WO 2004/100213 A2

3/pets
JC20 Rec'd PGT/PTO 07 NOV 2009**LED-BASED LIGHT BULB****BACKGROUND**

The present application relates to the art of LED lighting systems. It finds particular application in the light packages traditionally employed in an incandescent light source and will be described with particular reference thereto. Those skilled in the art will appreciate the applicability of the present invention to the applications where a use of an LED light source in a traditional bulb light package can provide advantages such as increased durability, light output stability and energy savings.

Typically, incandescent light bulb packages utilize a light source that includes an incandescent filament within a glass enclosure. However, the incandescent filaments are fragile and tend to gradually degrade during lifetime of a bulb causing the useful light output generated by the filaments to decrease over time. The increasing fragility of the filament with age eventually leads to breakage. Typical incandescent light bulbs have a mean life of 500 to 4,000 hours.

Light emitting diodes (LEDs) present an attractive alternative as a light source in a light bulb package. A low-power, solid-state LED light could last up to 100,000 hours (eleven years), far outdistancing the life of a typical incandescent bulb. When the LED degrades to half of its original intensity after 100,000 hours, it continues operating with a diminished output. In the state of operation with the diminished output, the LEDs are still ten times more energy-efficient than incandescent bulbs, and about twice as efficient as fluorescent lamps. Besides producing little heat and being energy-efficient, LEDs are solid-state devices with no moving parts. LEDs characteristics do not change significantly with age, and they are not easily damaged by shock or vibration. This makes LED lighting systems very reliable. The small shape and low heat generated by the LEDs enables lighting systems to take on various shapes and sizes.

A widespread use of the LED lighting systems have been limited because the consumers are accustomed to seeing and purchasing the traditional bulb lights. The number of various bulb light packages on the market is tremendous. In addition to the unique cosmetic appearance, the packages differ in luminescent levels, color
5 temperatures, electrical requirements, and other characteristics. One approach has been to directly retrofit the LED into the existing light package. However, the single LED does not produce the light output of the same optical characteristics as each existing incandescent bulb lamp. In addition, the LEDs emit highly directional light resulting in a narrow light angle and require different input power.

10 The present invention provides a new LED lamp.

BRIEF DESCRIPTION

According to one aspect of the application, a light source is disclosed. A light engine generates light of one of a plurality of wavelengths. The light engine includes
15 a platform and at least one LED disposed on the platform. An enclosure surrounds a light generating area of the light engine. A base includes a heat sink for conducting thermal energy away from the at least one LED. The light engine is mounted onto a heat sink. A conversion circuit supplies electric power to the light engine.

One advantage of the present application resides in providing a common
20 light engine that is used across various bulb platforms.

Another advantage resides in providing an adaptable and scalable LED lamp design.

Still further advantages and benefits of the present invention will become apparent to those of ordinary skill in the art upon reading and understanding the following
25 detailed description of the preferred embodiments.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention may take form in various components and arrangements of components, and in various steps and arrangements of steps. The drawings are only for
30 purposes of illustrating the preferred embodiments and are not to be construed as limiting the invention.

FIGURE 1 schematically shows a cross-section of an LED-based lamp;

FIGURE 2 schematically shows a top view of a platform including LEDs;

FIGURE 3 schematically shows a cross-section of an LED-based lamp which includes a heat dissipating slug;

FIGURE 4 schematically shows a cross-section of an LED-based lamp which includes an extended heat dissipating slug;

5 FIGURE 5 schematically shows a cross-section of an LED-based lamp which includes a phosphor panel; and

FIGURE 6 schematically shows a cross-section of an LED-based lamp which includes a filament light guide.

10 DETAILED DESCRIPTION

With reference to FIGURES 1 and 2, a lighting system 10 includes one or more LEDs 12 which are positioned on a mounting platform 14, defining a light engine 16. Wire leads 18, 20 are provided for powering the LEDs 12. The LEDs 12 is one of inorganic and organic light emitting devices which emit light in a spectrum from UV to infrared. Variations in optical performance, viewing angles, and intensity levels are achieved by arranging the LEDs in different patterns. The lighting system 10 includes a light cover or enclosure 22. Preferably, the enclosure 22 is a traditional bulb-shaped enclosure. Optionally, the enclosure 22 is a custom built enclosure to provide non-uniform light output to create special visual effects. It is contemplated that the enclosure 22 can be spherical, elliptical, cylindrical, domed, squared, n-sided, or any other shape. Preferably, the enclosure 22 is built of light transparent or translucent materials, or a combination thereof. The enclosure 22 materials are selected from glass, plastic, acrylic, polycarbonate, or other suitable materials.

Preferably, the platform 14 is a substrate on which a semiconductor may be grown. The platform 14 can be one of sapphire, gallium arsenide, silicon carbide, gallium phosphorous, gallium arsenide, gallium nitride, or other suitable material. It is also contemplated that the platform 14 can be a printed circuit board, heatsink, or any other suitable means for mounting the LEDs 12. The LEDs 12 are attached to the platform 14 by one of solder, wirebonding, thermosonic, thermocompression, electrical conductive adhesives, thermal conductive adhesives, other suitable means, or a combination of the above. It is also contemplated that the LEDs 12 can be adjacent to or manufactured as an integral part of the cover 22.

The platform 14 is adapted to be directly mounted into a base or socket 24. In one embodiment, the base 24 has a receptacle into which the light engine 16 is

plugged in. Preferably, the base 24 is one of the commercially available light bulb sockets for easy field exchange and retrofitting of the light bulb with the LED light engine 16 such that the enclosure 22 can be fitted over the light engine 16. E.g., in one embodiment, the base 24 is one of commercially available incandescent light sockets
5 such as 6S6 screw base, 194 wedge base, or other. Such design allows the conventional lamp to be replaced with a variety of different LED light engines without modification to the lamp socket or to the lamp enclosure. Optionally, the base 24 is custom manufactured. At least one heatsink 26 is integrally disposed in thermal communication with the light engine 16 and the base 24 to take the heat away from the LEDs 12. The
10 heatsink 26 is constructed from the material capable of conducting the heat away from the LEDs 12. Examples of suitable materials include copper, aluminum, silicon carbide, boron nitride and others known to have a high coefficient of thermal conductivity.

Preferably, an index matching material 28 is applied to encompass the light engine 16 to improve the light extraction. The index matching material is selected
15 from silicones, acrylics, epoxies, thermoplastics, glasses and any other appropriate materials. Optionally, an index matching fluid, which preferably serves as a thermal spreading medium, is present between the light engine 16 and the cover 22. The fluid is selected from solids, gels, liquids, fluorocarbon coolants, luminescent materials and others to create a desired visual effect. Additionally, reflective or translucent particles
20 may added to the fluid for further visual effects. The cover 22 works together with the internal fluid to optimize light extraction and/or provide visual effects. In one embodiment, the index matching material 28 is structured to provide lensing.

In order to provide suitable electrical power to the LEDs 12, the lighting system 10 includes one or more of an electric power conversion circuit, or control
25 electronics, or power electronics circuits 30, which are preferably integrated with the light engine 16. Alternatively, the electric power conversion circuit 30 can be adjacent the light engine 16, located within the base 24, or disposed remotely from the lighting system 10. In one embodiment, the electric power conversion circuit includes an AC/DC converter which permits the LED-based lighting system 10 to be powered by a
30 standard domestic 120VAC or international 220VAC user voltage. Such circuitry makes the LED lamp a true replacement for a bulb light. Preferably, the power electronics circuits 30 are two- or three-dimensional structures to provide minimal dimensions. In one embodiment, the electric power conversion circuits 30 are flexible circuits. Optionally, the electric power conversion circuits 30 are non-planar circuit boards.

With reference to FIGURE 3, the lighting system 10 includes a heat dissipating slug 32. The heat dissipating slug 32 is disposed in a thermal communication with the base 24 to conduct the heat from the light engine 16 into the base 24. Optionally, the heat dissipating slug 32 transfers the heat from the light engine 16 into the air. Preferably, the heat dissipating slug 32 includes a plurality of radial fins 34 disposed about an outer periphery of the slug 32.

With reference to FIGURE 4, the heat dissipating slug 32 extends beyond the base 24 to transfer the heat from the light engine 16 into the air.

Optionally, the base 24 includes at least one of thermoelectric cooling, piezo synthetic jets, qu-pipes, heat-pipes, piezo fans and electric fans, or other forms of active cooling.

With reference to FIGURES 5 and 6, the lighting system 10 includes a wavelength converting material such as organic or inorganic phosphor. The phosphor can be located in any suitable location, such as integrated into the LED 12, at a light guide 36, coated inside or outside the cover 22, contained within the cover 22, or a combination thereof.

In one embodiment, the enclosure 22 includes transparent organic phosphors which are preferably coated on an inside, or outside surface of the enclosure 22, or a combination thereof. It is also contemplated that the phosphors can be dissolved, melted, coextruded, or dispersed by any other means within the walls forming the enclosure 22. Preferably, the phosphor distribution is uniform. In one embodiment, the phosphor distribution is non uniform to create preselected patterns, figures, special visual effects of different colors, and other effects. It is also contemplated that both transparent and conventional non-transparent phosphors can be used to create special effects, patterns, or figures. In one embodiment, the enclosure 22 is frosted or otherwise treated to provide special visual effects. Examples of the organic transparent phosphors are the BASF Lumogen F dyes such as Lumogen F Yellow 083, Lumogen F Orange 240, Lumogen F Red 300, and Lumogen F Violet 570. Of course, it is also contemplated that other phosphors such as the rare earth complexes with organic component described in the U.S. Patent No. 6,366,033; quantum dot phosphors described in the U.S. Patent No. 6,207,229; nanophosphors described in the U.S. Patent No. 6,048,616, or other suitable phosphors can be used.

With continuing reference to FIGURE 5, the UV light rays 40 are emitted by the LEDs 12 and converted into white or visible light 42 by a phosphor 44. The

phosphor 44 preferably includes two or more phosphors to convert the emitted light 40 to the visible light 42, although single component phosphors are embodied for saturated color light generation as well. The visible light 42 exits through the enclosure 22. In this embodiment, the phosphor mix 44 is disposed about or within a light guide 36
5 which is a planar panel disposed above the LED 12 such that the majority of the light rays 40 strike the panel.

With reference again to FIGURE 6, the light guide 36 is a filament which is disposed within the enclosure 22 to create a "filament-look" LED based lighting system. More specifically, phosphor 44 is applied directly to the LED 12 such that the
10 emitted light 40 is converted into visible light 42 at the LED 12. The visible light 42 strikes the light guide 36 and adapts the filament shape to simulate a "filament-look" light bulb. Alternatively, a suspended reflector may be used to simulate the filament shape. The reflector can be "wadded" tin foil, a coiled aluminized spring, or the like. Optionally, the light guide 36 is a coiled fiber optic with surface, internal, or other diffusers, such as
15 frustrated TIR (Total Internal Reflection) diffusers, to allow the light to escape at the desired locations.

The invention has been described with reference to the preferred embodiments. Modifications and alterations will occur to others upon a reading and understanding of the preceding detailed description. It is intended that the invention be
20 construed as including all such modifications and alterations insofar as they come within the scope of the appended claims or the equivalents thereof.

CLAIMS:

Having thus described the preferred embodiments, the invention is now claimed to be:

1. A light source (10) comprising:
a light engine (16) for generating light of one of a plurality of wavelengths,
the light engine (16) including:
a platform (14), and
5 at least one LED (12) disposed on the platform (14);
an enclosure (22) surrounding a light generating area of the light engine (16);
a base (24) including a heat sink (26) for conducting thermal energy away from the at least one LED (12), into which heat sink (26) the light engine (16) is mounted;
10 and
a conversion circuit (30) for supplying electric power to the light engine (16).
2. The light source as set forth in claim 1, further including:
15 a luminescent converting element (44) to receive the light generated by the light engine (16) and convert at least some of the received light to visible light.
3. The light source as set forth in claim 2, further including:
a light guide (36) disposed within the enclosure (22).
- 20 4. The light source as set forth in claim 3, wherein the luminescent converting element (44) is adjacent at the least one LED (12).
5. The light source as set forth in claim 4, wherein the light guide (36)
25 provides an appearance of a filament.
6. The light source as set forth in claim 4, wherein the light guide (36) comprises an optical fiber with one of internal diffusers, external diffusers, and other

frustrated TIR (Total Internal Reflection) features to allow the light to escape at preselected locations.

7. The light source as set forth in claim 3, wherein the light guide (36)
5 comprises a reflector.

8. The light source as set forth in claim 7, wherein the reflector is comprised of a reflective metal.

10 9. The light source as set forth in claim 3, wherein the luminescent converting element (44) is disposed on or within the light guide (36).

10. The light source as set forth in claim 2, wherein the luminescent converting element (44) is disposed on or in the enclosure (22).

15

11. The light source as set forth in claim 10, wherein the luminescent converting element (44) includes a transparent phosphor.

12. The light source as set forth in claim 11, wherein the transparent phosphor
20 comprises one of:

an organic phosphor,
an organic complex of a rare earth metal,
a nanophosphor, and
a quantum dot phosphor.

25

13. The light source as set forth in claim 10, further comprising:
one of an index matching material and a lensing material encompassing the at least one LED (12).

30 14. The light source as set forth in claim 1, wherein the base (24) is adapted for mating with the light engine (16).

15. The light source as set forth in claim 1, wherein the heat sink (26) comprises:

a slug (32) inserted into the base (24) for conducting the thermal energy from the at least one LED (12) to at least one of the base (24) and ambient air.

16. The light source as set forth in claim 15, wherein the slug (32) comprises:
5 a plurality of fins (34) disposed in one of a radial and a cylindrical tube longitudinal design about an outer periphery.

17. The light source as set forth in claim 1, wherein the heat sink (26) extends radially from the base (24) to conduct the thermal energy to ambient air.

10

18. The light source as set forth in claim 1, wherein the conversion circuit (30) comprises:
an AC to DC converter.

15

19. The light source as set forth in claim 1, wherein the platform (14) comprises one of:
a metal clad, FR4, and CEM-1 printed circuit board hosting the at least one LED.

20. The light source as set forth in claim 1, wherein the enclosure (22) comprises a substantially transparent enclosure of a variety of shapes

20

21. The light source as set forth in claim 20, wherein the enclosure (22) comprises a light diffusing coating.

25

22. The light source as set forth in claim 1, further comprising:
an index matching fluid between the light engine (16) and the enclosure (22).

23. A modular adaptable LED lighting system (10) comprising:
a screw base module (24);
30 at least two light modules (16) having different light emission characteristics,
each light module (16) including:

a platform (14) which is adapted for mating with the base module (24), and

at least one LED (12) disposed on the platform (14) for generating
light in a range from ultraviolet to infrared wavelenthgs;
an enclosure (22), which surrounds the light produced by the light module (16)
such that at least a portion of the light is transmitted through the enclosure (22); and
5 a power module (30) for energizing the at least one LED (12).

1/3

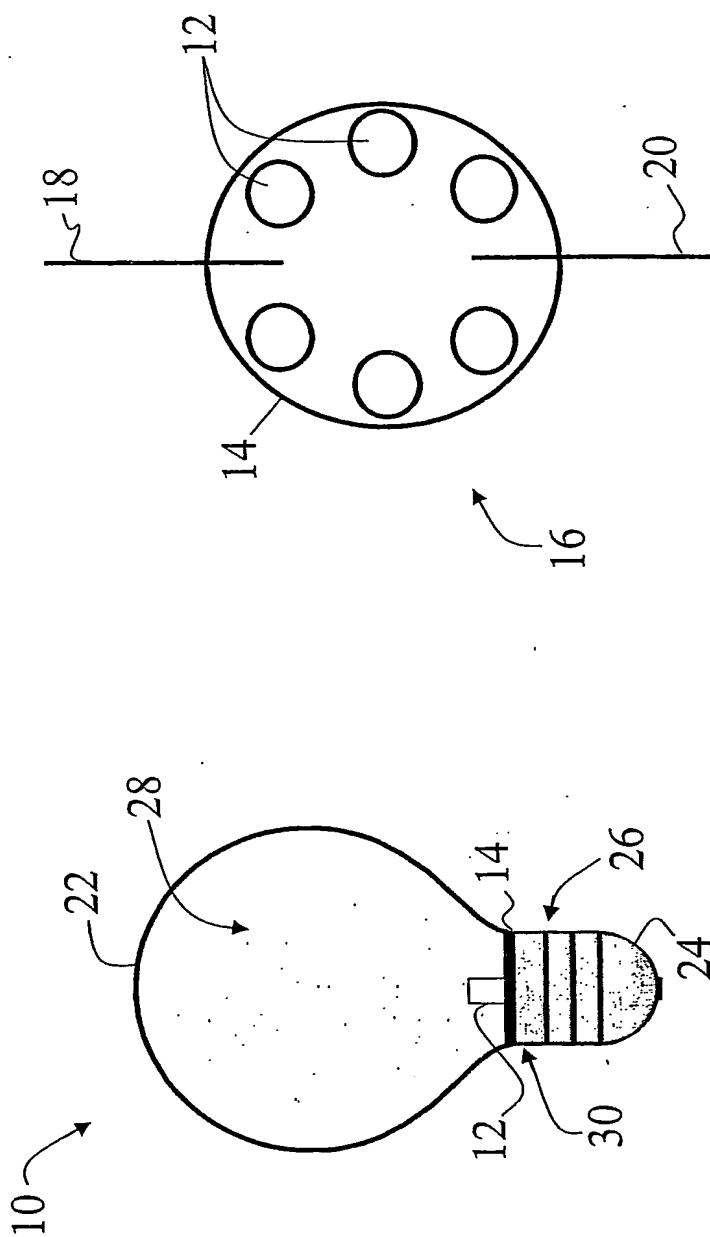


FIG 2

FIG 1

2/3

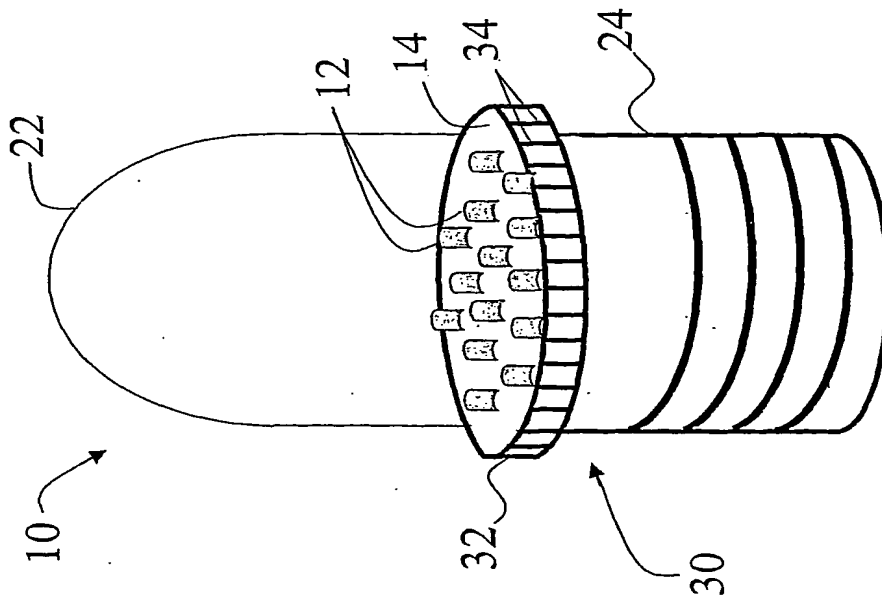


FIG 4

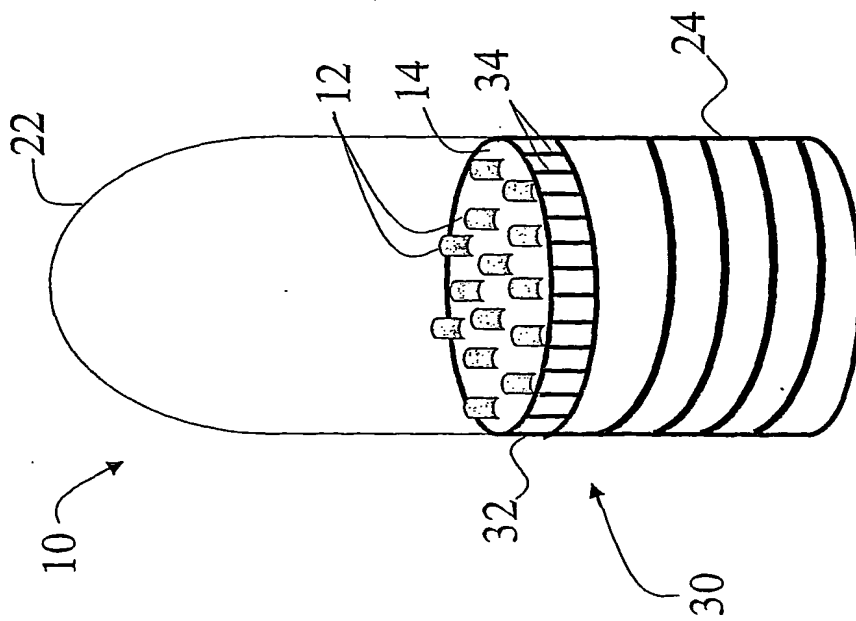


FIG 3

3/3

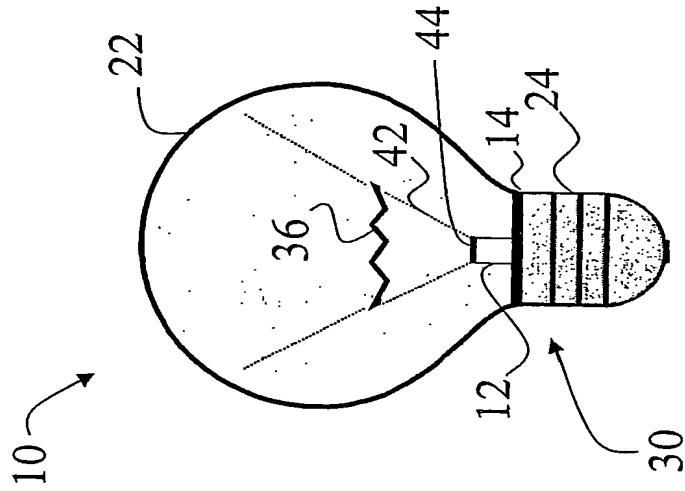


FIG 5

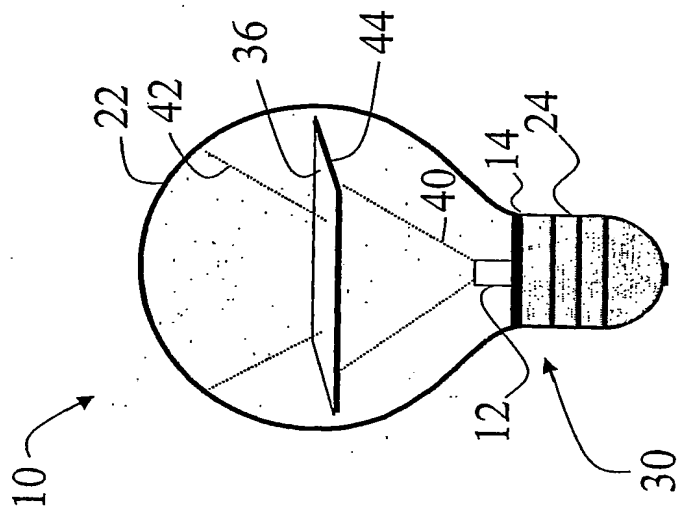


FIG 6

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
18 November 2004 (18.11.2004)

PCT

(10) International Publication Number
WO 2004/100213 A3

(51) International Patent Classification⁷: **F21V 5/00**,
1/00, H01L 21/00, 21/48

(21) International Application Number:
PCT/US2004/014414

(22) International Filing Date: 5 May 2004 (05.05.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/467,925 5 May 2003 (05.05.2003) US

(71) Applicant (for all designated States except US): **GEL-CORE LLC** [US/US]; 6180 Halle Drive, Valley View, OH 44125-4635 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BOHLER, Christopher, L.** [US/US]; 4930 Corkwood Drive, North Royalton, OH 44133 (US). **KOLODIN, Boris** [US/US]; 2634 Brentwood Road, Beachwood, OH 44122 (US). **RADKOV, Emil** [BG/US]; 26241 Lakeshore Boulevard, #670, Euclid, OH 44132 (US). **AANEGOLA, Srinath, K.** [IN/US]; 4810 Buckingham Drive, Broadview Heights, OH 44147 (US). **WEAVER, Stanton, E., Jr.** [US/US]; 119 Hemlock Terrace, Northville, NY 12134 (US). **PETROSKI, James,**

T. [US/US]; 2688 Sherwood Drive, Parma, OH 44134 (US). **BROWN, Zena** [US/US]; 23414 Cedar Road, Beachwood, OH 44122 (US).


(74) Agent: **MCCOLLISTER, Scott, A.**; Fay, Sharpe, Fagan, Minnich & McKee, LLP, 1100 Superior Avenue, 7th Floor, Cleveland, OH 44114 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: LED-BASED LIGHT BULB

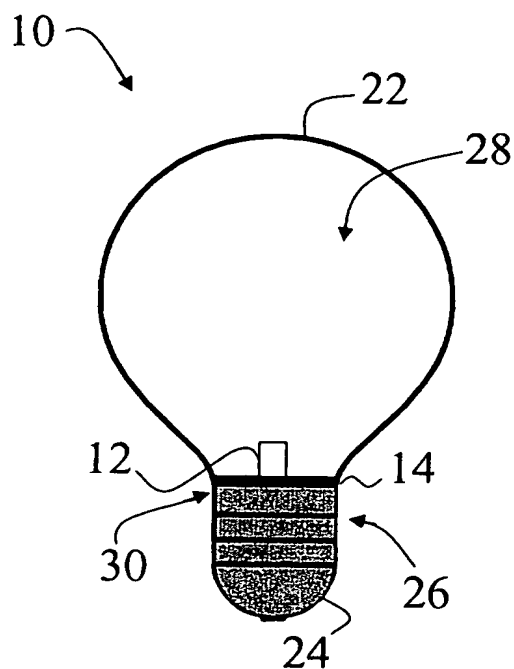

(57) Abstract: A light source (10) comprises a light engine (16), a base (24), a power conversion circuit (30) and an enclosure (22). The light engine (16) comprises at least one LED (12) disposed on a platform (14). The platform (14) is adapted to directly mate with the base (24) which is a standard incandescent bulb light base. Phosphor (44) receives the light generated by the at least one LED (12) and converts it to visible light. The enclosure (22) has a shape of a standard incandescent lamp.



Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(88) Date of publication of the international search report:

30 June 2005

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US04/14414

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : F21V 5/00, 1/00; H01L 21/00, 21/48

US CL : 362/327, 240, 245, 800, 236, 241, 249, 439; 359/718; 438/26

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 362/327, 236, 240, 245, 241, 249, 439, 243, 800

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
NONE

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
NONE

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y,E	US 6,746,885 B2 (CAO) 08 June 2004 (08.06.2004), see entire document.	1-23
Y	US 6,149,283 A (CONWAY et al) 21 November 2000 (21.11.2000), see entire document.	1-23
Y,E	US 6,814,470 B2 (RIZKIN et al) 09 November 2004 (09.11.2004), see entire document.	1-23

☐ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

* Special categories of cited documents:	
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

17 December 2004 (17.12.2004)

Date of mailing of the international search report

04 MAY 2005

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US
Commissioner for Patents
P.O. Box 1450
Alexandria, Virginia 22313-1450

Facsimile No. (703) 305-3230

Authorized officer

CHUC TRAN

Telephone No. (571) 272-1829

Henry Park